


Acoustic Values

OPEN STUDIO /

Canvas / Canvas Trace / Primer



Sound Absorption (ISO 354)


Impact Sound (ISO 140-8 / ISO 10140-3)

Open Studio
WellBAC® Comfort α_w 0.30 (H) Class D

Open Studio
WellBAC® Comfort ΔL_w 30dB

Sound absorption coefficient α_s

FREQUENCY (Hz)	WellBAC® Comfort α_s
100	0.01
125	0.00
160	0.02
200	0.04
250	0.07
315	0.18
400	0.53
500	0.39
630	0.28
800	0.26
1000	0.27
1250	0.28
1600	0.31
2000	0.35
2500	0.40
3150	0.41
4000	0.47
5000	0.49

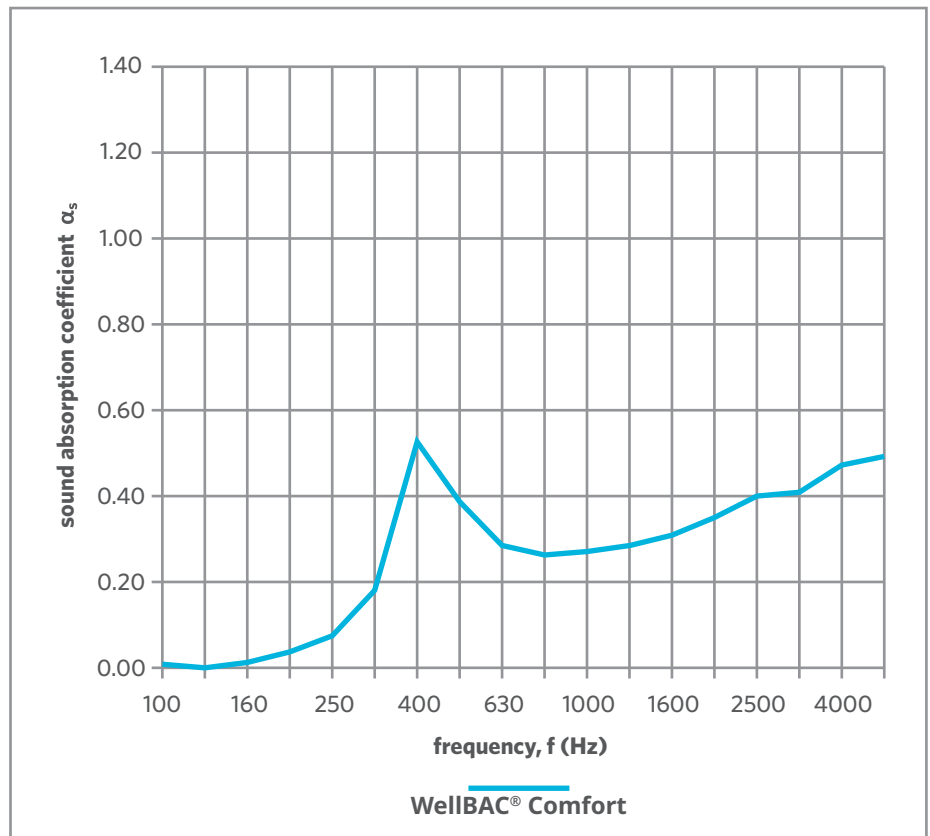

α_{pi} values (WellBAC® Comfort)

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.00	0.10	0.40	0.25	0.35	0.45

α_w Class

α_w (overall value)	Class
0.30 (H)	D